

TODD ET SD - 2W - 100° - IP65



Downlight with circular frame, made with 316 AISI stainless steel with satinized anti-shock material diffuser, ideal for ceiling and wall installation.

Frame with minimal thickness

With satin diffuser

On/off and dimmer touch switch

1 2

Presentation	Technical data	2D draws	Accessories
--------------	----------------	----------	-------------



3 Standard finishes:



2 Finishes on request:





GINEICO

Specifications

Power type	Constant Voltage
Light source	LED
Supply	10 ÷ 30 V
Power consumption	2 W
Current consumption	0.09 A @ 24V
Average lifetime	50,000 h
Dimmable	Yes
IP security degree	65


Dimensions


Frame	Ø 2 53/74"
Recess	49/64"
Hole	Ø 2 1/8"

Design

Frame material	AISI 316 S/STEEL
Finishings	BLACK PVD / GOLD PVD
Light colours	DAYLIGHT / WARM WHITE / BLUE / RED
Mounting	SPRINGS
Switch	Yes

Photometric data

DAYLIGHT	3800-4100 °K	
	CRI	≥ 90
	Angle	100°
	Light flow	160 lm
	Lighthness - distance 1 m	Ø 2.25 m 68.0 lux
	Lighthness - distance 2 m	Ø 4.49 m 17.0 lux
	Lighthness - distance 3 m	Ø 6.47 m 7.6 lux

WARM WHITE	2900-3100 °K	
	CRI	≥ 90
	Angle	100°
	Light flow	130 lm
	Lighthness - distance 1 m	Ø 2.25 m 55.0 lux
	Lighthness - distance 2 m	Ø 4.49 m 13.8 lux
	Lighthness - distance 3 m	Ø 6.74 m 6.1 lux

BLUE	Angle	100°
-------------	-------	------

BLUE	Angle	100°
-------------	-------	------


RED	Angle	100°
------------	-------	------

Certifications





GINEICO

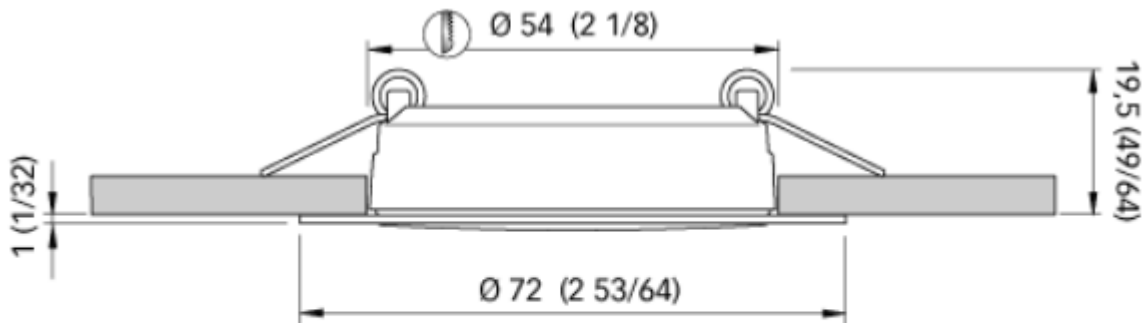

Dimensions in mm (inches)

BI-COLOUR version: 2W white light + colored courtesy light
LED Protection: Spike protected $\pm 500V$
Polarity sensitive: YES



G45, 76-84 WATERWAY DRIVE COOMERA, QUEENSLAND, 4209, AUSTRALIA

PHONE: (+61) 7 5556 0244

EMAIL: SALES@GINEICOMARINE.COM.AU

WWW.GINEICOMARINE.COM.AU